
THE LATEST AND THE BEST!

WARM STREAM

AUTOMATIC GAS-FIRED WATER HEATER

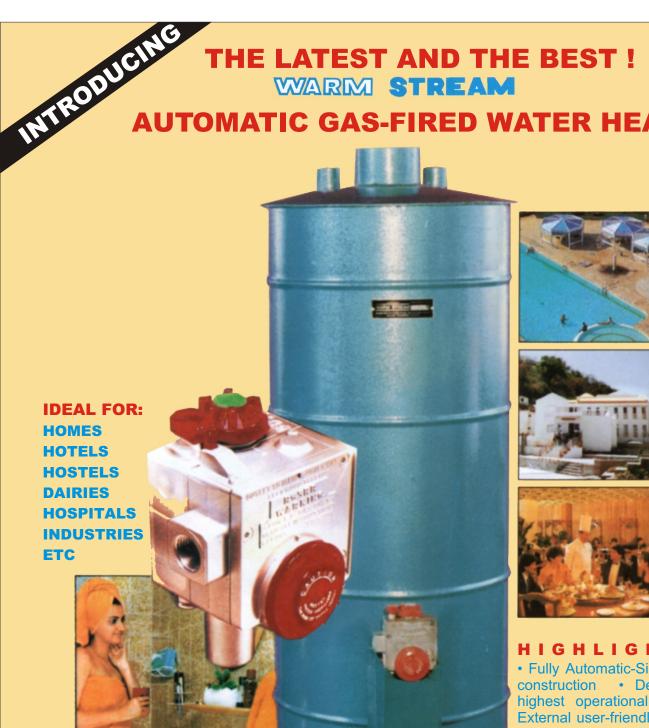

HIGHLIGHTS :

 Fully Automatic-Simple, robust construction • Designed for highest operational safety . External user-friendly + easy to maintain • energy - efficiency at Its best • Absolutely economical - cheaper than electricity

WHAT MORE CAN ONE ASK FOR!

SALIENT FEATURES:

- 1. Specially selected energy efficient thermal insulation significantly minimises losses.
- 2. Highly sensitive, quick-acting thermostat starts heating water quickly.
- 3.The flue baffle maximises heat absorbtion in the Flue Tube; by minimising air movement in the heater. During standby periods it further reards heat loss up the flue (Smoke tube)
- 4.Fully automatic control shuts off the gas, once the pilot burner is extinguished either by operator or by accident.
- 5.Pilot burner ignites main burner once water temperature falls below pre-set level and shuts it off, as soon as the desired temperature is reached.
- 6.Relief, aginst pressure build-up through intel cold water to overhead tank, for 100% safely.

- 7. Built-in gas pressure regulator ensures uniform gas flow, under all conditions.
- 8. Imported energy saving gas controls and cut-off mechanisms ensure absolute safety.
- 9. Three convenient thermostal settings at your finger tips (warm, Hot and very Hot).
- Accordingly, you get water at the pre-set tempreature throughout the 24 hrs a day. No need
 - fire or extinguish the burner.
- 11. Simple robust construction using heavy guage steel tanks for longer life.
- 12. Hand-hole clean-out door makes internal cleaning very simple and easy.
- 13. The size of water connections provided ensures full-flow delivery to the fixture.
- 14. Long-dip tube introduces cold water near bottom of the tank, increasing amount of hot water available For withdrawal at top.
- 15. No need of any hazardous electrical controls.

Comes in choice of three convenient models:-

MODEL	DDEL RECOMMENDATION FOR CONNECTIONS				DIA	HEIGHT
	NOS. OF 1/2" 0 HOT WATER CONN.	Number OF PERSONS	COLD WATER INLET 0	HOT WATER OUTLET 0	M.M.	M.M.
50 Letter.	1	5 to 8	1"	1"	350	1000
100 letter	2	9 to 15	1"	1"	410	1250
150 Letter	4	16 to 25	1"	1"	410	1800



ISO 9002 CERTIFIED

MANUFACTURED BY



ANAND SOJITRA ROAD, P.O. BOX-22, VALLABH VIDYANAGAR, DIST.: ANAND.GUJARAT 388 001, INDIA.

PHONE: (02692) 31316, 32309 • FAX: (02692) 364778

SURAT OFFICE: 261-476326
E-mail: warm.stream@gnahd.global.net.in
Web site: 1) www.warmstream.co.in
2) www.warmstream.net